




SAM MIX

**PLASTERING WALL
FINISHING**
牆身灰油
DINDING MINYAK
KELABU

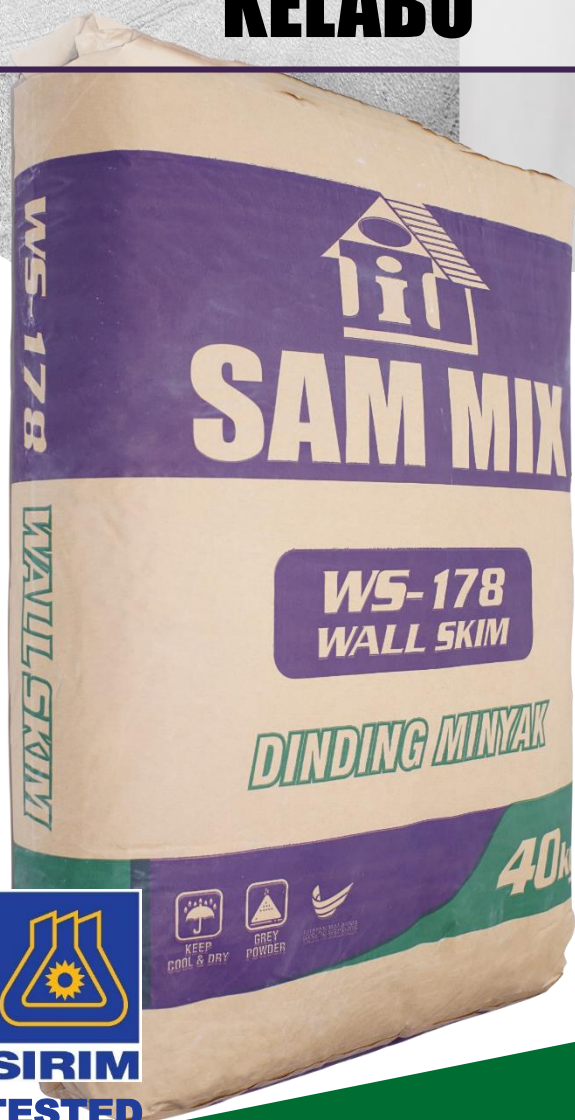

WALL SKIM

WS-178

- ✓ *Excellent adhesion*
- ✓ *Excellent workability*
- ✓ *Good water resistant*
- ✓ *Scratch resistant*
- ✓ *Non-toxic & non-corrosive*
- ✓ *Easy to mix and apply*



Packaging Size:
40KG

WALL SKIM (WS-178)

Properties

WALL SKIM (WS-178) is a high quality polymer modified water-resistant cement-based thin finishing coat for plastered walls. It is specially designed for finishing improvement works on wet rendered wall surfaces.

WALL SKIM (WS-178) 是一种高质量的聚合物改性防水水泥面层腻子，用于抹内墙灰油。它专为表面改善工程而设计。

WALL SKIM (WS-178) adalah lapisan penamat nipis berasaskan simen tahan air yang diubah suai polimer berkualiti tinggi untuk dinding terpampang. Ia direka khas untuk kerja pembaikan permukaan ke permukaan dinding yang basah.

Appearance	Grey
Binder	OPC Portland Cement
Filler Material	Calcium Carbonate Powder
Additives	Additives to enhance work-ability, water retention and adhesion
pH	12
Aggregate Size	0.5 mm max
Pot life	Approx. 2 hours
Coverage	Approx. 1.1KG/m ² /mm
Recommendation Thickness	1 - 2 mm per coat
Adhesion To Concrete - Tensile Test - Shear Adhesion - Comp. Strength	≥ 0.5 N/mm² ≥ 1.0 N/mm² ≥ 3.0 N/mm²
Toxicity	Chemically inert and non-toxic
Mixing Ratio	Approx. 45% Water

Usage

1. Substrate must be dry, sound, flat / true & free of contaminants.
2. Do not add cement or lime into the mixture.
3. Do not use on painted surface.
4. Where necessary, dampen the dry concrete or plastered surfaces before application of **WALL SKIM (WS-178)**.
5. Mix **WALL SKIM (WS-178)** with water as per the recommended mix ratio. Mechanical mixing recommended.
6. Mix thoroughly for 3-5 minutes using mechanical mixer until homogeneous paste is achieved and lump free.
7. Allow mixture to stand for 5 minutes for additives to dissolve.
8. Re-mix if the mixture is left unattended for more than 30 minutes.
9. Apply by using a steel trowel or spatula.